




CDE

CAP	STROKE	MODEL	MAX FORCE kN		SECTION cm ²		VOLUME cm ³		MASS	DIMENSIONS (mm)													
			Push	Pull	Push	Pull	Push	Pull		A	B	C	D	E	F	G	H	L	M	N	P	R	T
5	30	CDE-5/30					21,2	9,8	2,1	174	204	154										102	
	60	CDE-5/60					42,4	19,6	2,7	207	267	184										132	
	100	CDE-5/100	49,5	22,9	7,1	3,3	70,7	32,7	3,5	247	347	224	49	30	22	M20x1,5	46	M35x1,5	14	M42x1,5	18		26
	160	CDE-5/160					113,1	52,3	4,3	307	467	284										232	
8	155	CDE-8/155-SH	78	45	11,4	6,5	177	101	6,6	389	548	364										249	
	257	CDE-8/257-SH					293	167	8,4	490	750	465	64	38	25	3/4"-16	38-56	1 11/16"-18	15	2"-12	19		38
10	60	CDE-10/60					95,4	58,5	5,7	242	302	224										150	
	100	CDE-10/100					159	97,5	6,5	282	382	264										190	
	160	CDE-10/160	111,3	68,2	15,9	9,7	254,5	155,9	8	342	502	324	68	45	28	M24x2	56	M48x1,5	16	M60x2	18		36
	260	CDE-10/260					413,5	253,4	10,5	442	702	424										250	
15	159	CDE-15/159-SH	139	70,7	20,3	10,1	322,8	160,6	10	389	548	360										252	
	260	CDE-15/260-SH					527,8	262,6	12,8	490	750	461	76	51	36	1 1/8"-12	54-73	2 3/16"-16	25	2 5/8"-16	25		54
22	80	CDE-22/80					265,5	138,2	14	342	422	316										186	
	160	CDE-22/160	232,3	121	33,2	17,3	530,9	276,5	17,5	422	582	396	92	65	45	M40x2	89	M70x2	26	M85x2	24	266	65
	260	CDE-22/260					862,8	449	21,5	522	782	496										366	
30	260	CDE-30/260	309,3	142,9	44,2	20,4	1148,6	530,9	33,5	532	792	504	113	75	55	M50x2	94	M80x2	28	M105x2	24	360	72

Higher tonnage cylinders and different strokes available.

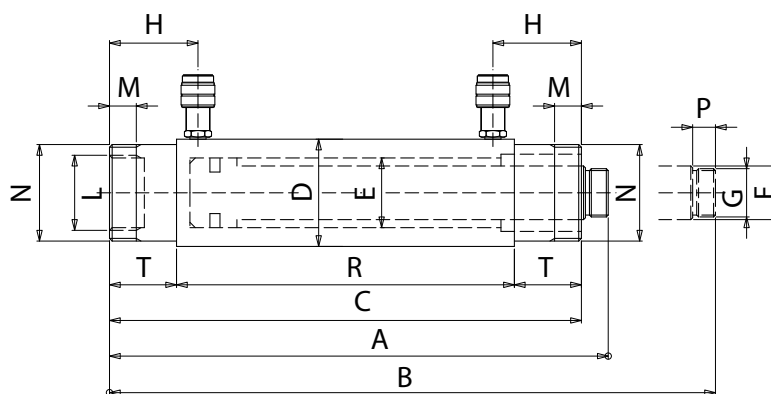